

Technical data

Categories No: TNIMH8

Name: Industrial Grade -OH Functionalized Multi-walled Carbon Nanotubes

Purity: >95%

-OH Content: 0.76 wt% (The rate of surface carbon atom: 8-10mol%)

OD:30-80nm [OD=Outer Diameter]

ID: 5-15nm [ID=Inner Diameter]

Length: <10um

SSA: >60m²/g [SSA=Special Surface Area]


Color: Black

Tap density: 0.18 g/cm³


True density: ~2.1 g/cm³

EC: >100s/cm [EC=Electric Conductivity]


Making method: CVD

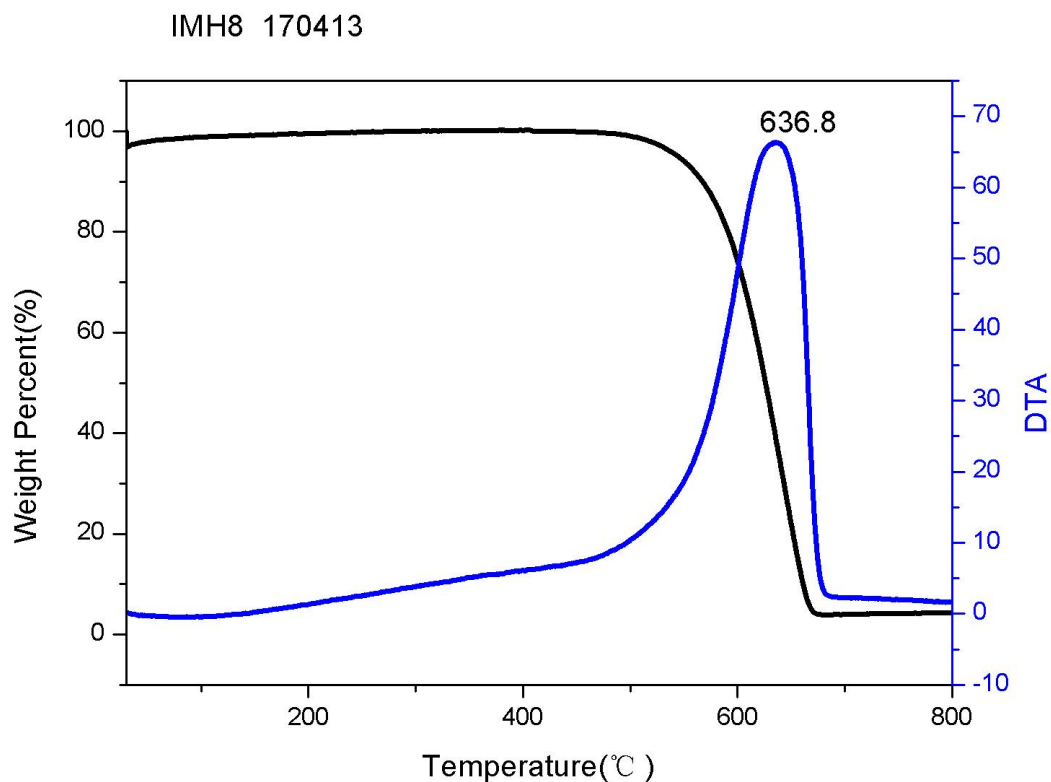

TGA

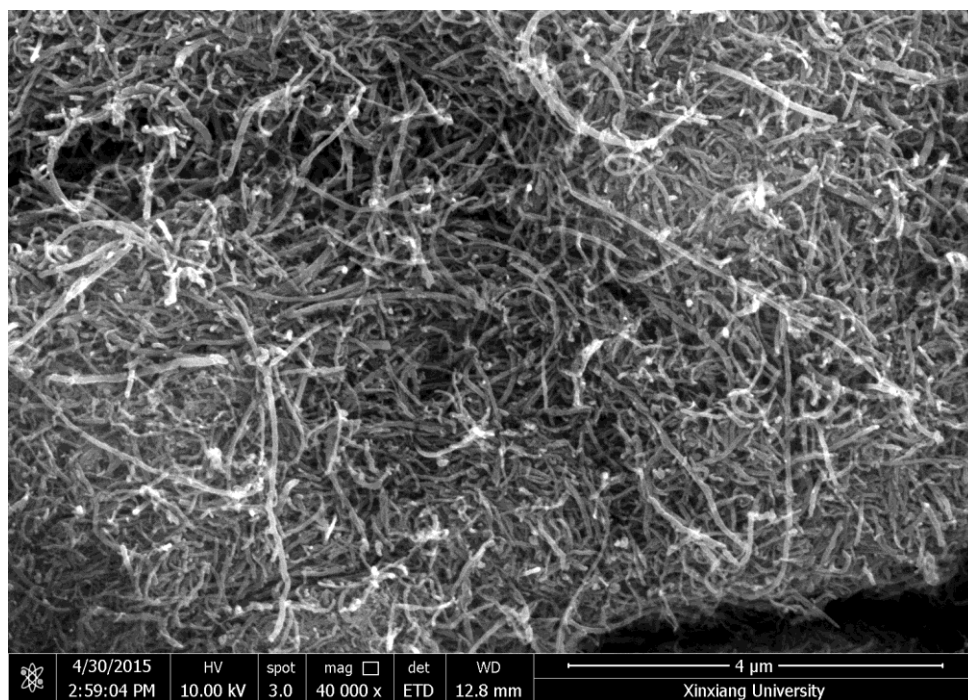

SEM

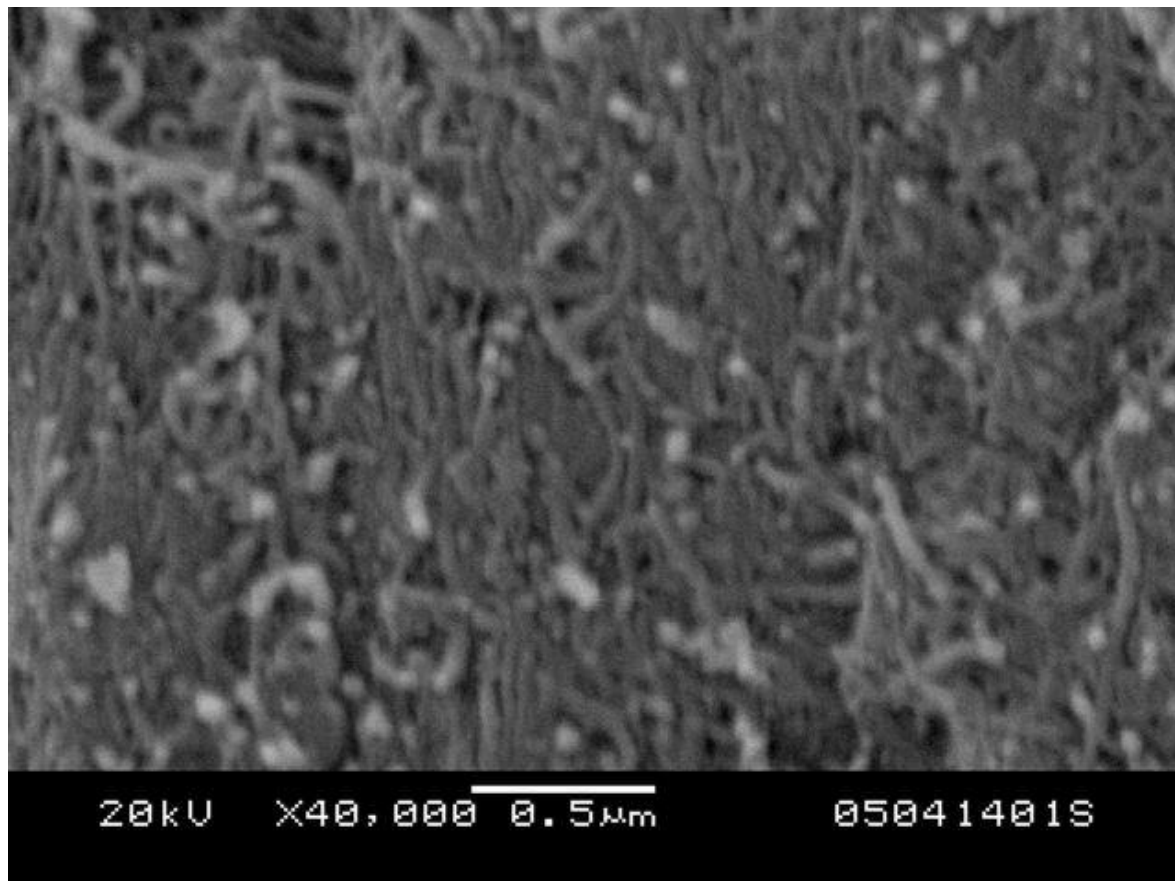

TEM

Application instruction

Potential Applications of Carbon Nanotubes

Additives in polymers

Catalysts

Electron field emitters for cathode ray lighting elements

flat panel display

gas-discharge tubes in telecom networks

Electromagnetic-wave absorption and shielding

Energy conversion

Lithium-battery anodes

Hydrogen storage

Nanotube composites (by filling or coating);

Nanoprobes for STM, AFM, and EFM tips

nanolithography

nanoelectrodes

drug delivery

sensors

Reinforcements in composites

Supercapacitor