

## Technical data

Categories No: TNGM5

Name: Graphitized Multi-walled Carbon Nanotubes

Purity: >99%


OD: 20-30nm [OD=Outer Diameter]

Length: 5-30um


SSA: >50m<sup>2</sup>/g [SSA=Specific Surface Area]

Color: Black


Making method: CVD, at 2800°C to preparation

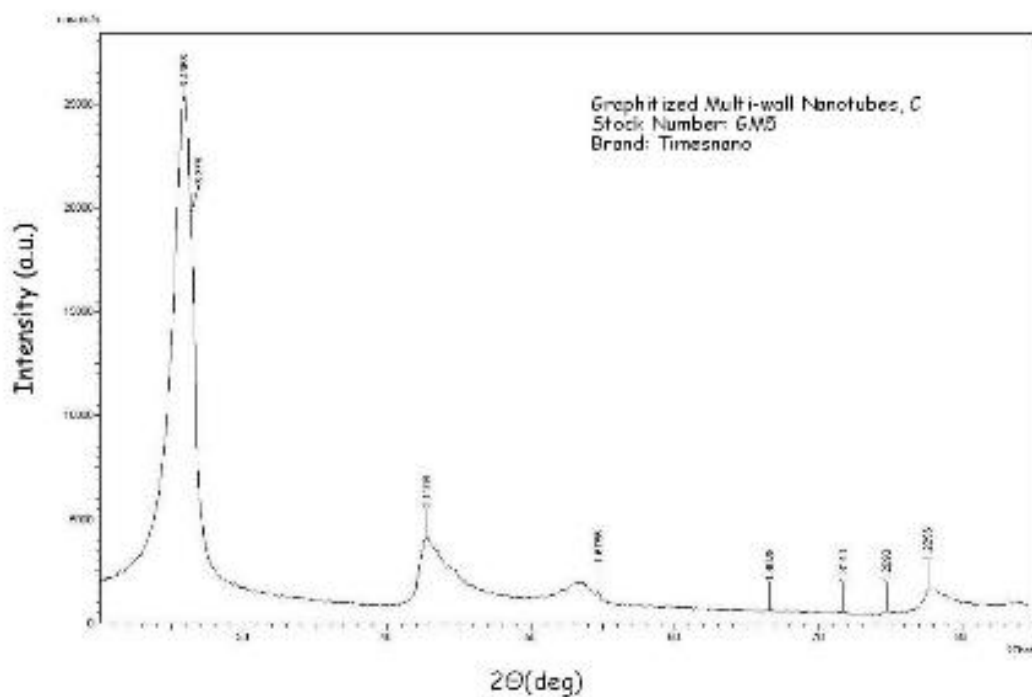

X-ray diffraction pattern

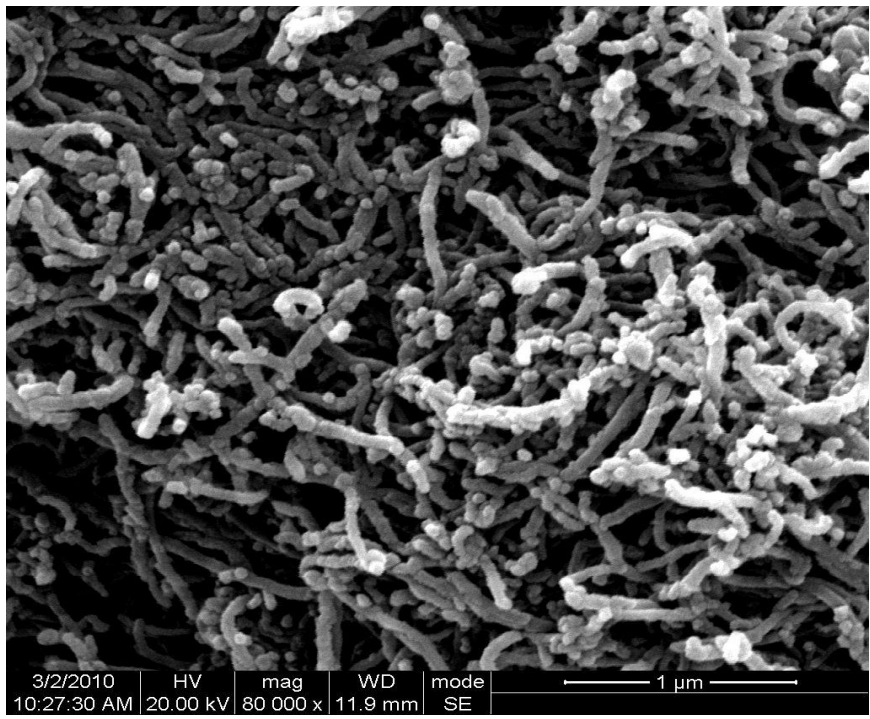

SEM

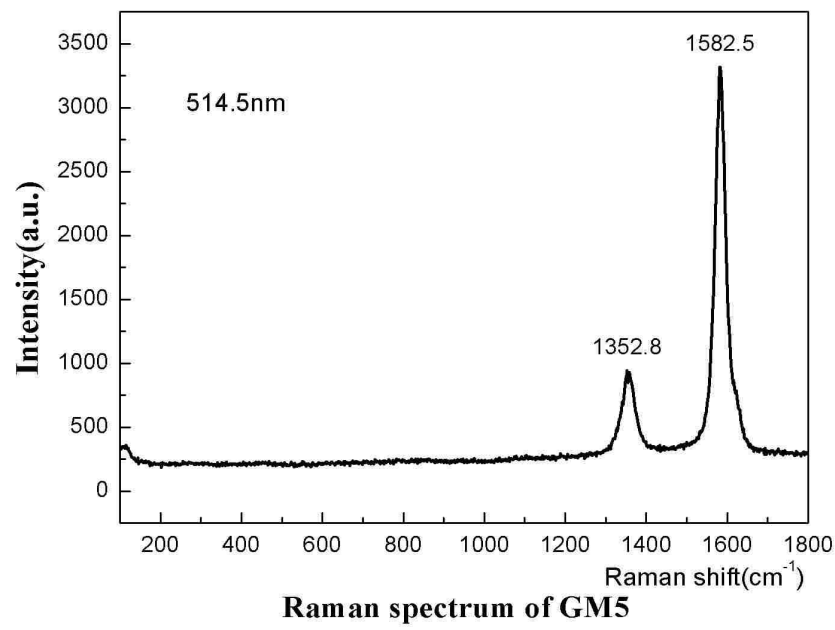

**Application instruction**

Potential Application of Carbon Nanotubes  
Additives in polymers

Catalysts

Electron field emitters for cathode ray lighting elements

Flat panel display

Gas-discharge tubes in telecom net works

Electromagnetic-wave absorption and shielding

Energy conversion

Lithium-battery anodes

Hydrogen storage

Nanotube composites (by filling or coating);

Nanoprobes for STM, AFM, and EFM tips

Nanolithography

Nanoelectrodes

Drug delivery

Sensors

Reinforcements in composites

Supercapacitor